





ASSEMBLY INSTRUCTION MODEL ADD-312-CH-CL

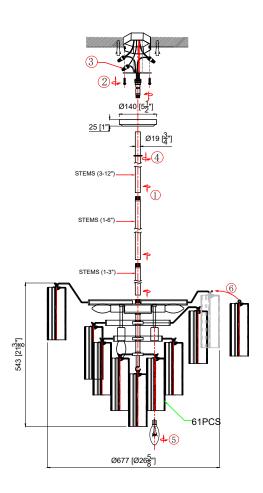



Dress the glass from tier #7.



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate



You will need 12-Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
This Fixture is Dry Rated

How to Install

- **1.** Decide the preferred hanging height and choose the correct number of rods needed.
- 2. Feed the wires and safety cable through the rods, screw collar ring and canopy. Screw the rods together. Screw one end of the rod assembly onto the top of frame and the other end onto the swivel on the mounting strap.
- Place the mounting strap over the outlet box and mark the two points on the ceiling with same distance as between the two holes on the mounting strap.
- **4.** Drill the holes at the marked points and insert the plastic anchors into the holes.
- 5. Raise the fixture up to the ceiling and wrap the safety cable around the mounting strap and secure with the locking device. When the wire connections are made, slip the canopy up along the rods and over the mounting strap. Secure with the screw collar ring.
- 6. Install the bulb into the socket.
- 7. Dress the glass as illustrated.

Glass Sets


1. 61 pcs Clear glass 2 3/4x7 3/4"

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov





PART NUMBER MODEL ADD-312-CH-CL

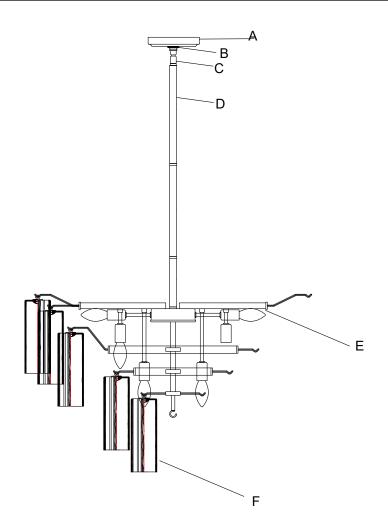

Part Number

Part Numbers

- A. (1)-Canopy,D 5 1/2XH1" XBN312CHCAN5.5IN
- B. (1)-Collar ring
- C. (1)-Swivel
- D. (1)- 6" Rod XBN300CHROD6IN
- E. (3) 12" Rods XBN300CHROD12IN
- F. (1)-Frame
- G. (61)-Glass,D2 3/4xH7 3/4" XBN300CHCLGLA7.75IN